


7.4.18 Postlanding — Pilot

- 1. SpeedBrake switch — RETract (on Hotas)
- 2. ANTI-SKID SPOILER BK switch — OFF. (On Left Vertical Console)
- 3. Flaps and Slats — UP.
3.a Move FLAP handle UP and check for complete retraction of main flaps and slats and auxiliary flaps (flap indicator — 0° and no FLAP caution light).
- 4. WING SWEEP MODE switch — BOMB (on Hotas). The EMERGENCY WING SWEEP handle and wings will move to 55°.
- 5. EMERGENCY WING SWEEP handle — To Over Sweep



5.a Raise cover, right click on handle to raise it and move aft to 68°.

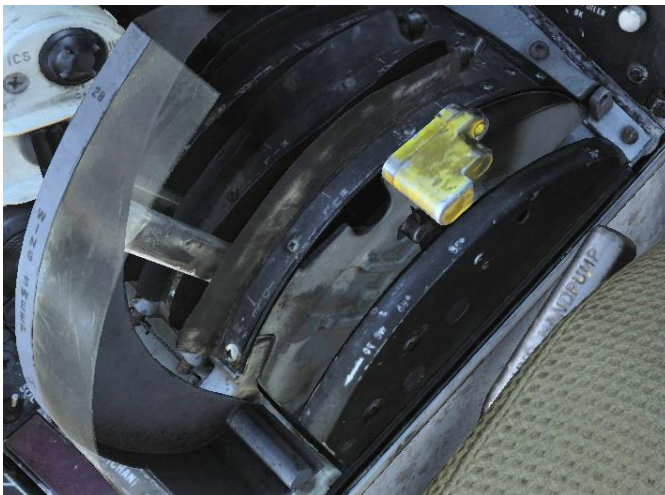

5.b When HZ TAIL AUTH caution light goes out and the OVER flag appears, it takes about 8 seconds, only then you will be able to move EMERGENCY WING SWEEP handle full aft (75° sweep position) and stow (left click on the handle).

5.c Rotate handle guard to stowed position. Doesn't Work on the Sim.



- 6. Avionics — OFF. Turn off all avionics (Data Link, Radar altimeter, Displays, Tacan, ARA-63), except UHF radio.
- 8. Right throttle — OFF (by left click on it when at IDLE)
- 9. HYD TRANSFER PUMP switch — SHUTOFF. Check hydraulic transfer pump operation in the combined-flight direction with the HYD PRESS, OIL PRESS, R GEN, and R FUEL PRESS caution lights illuminated.



- 10. Ejection seat — Safe. Click on top of the Seat.
- 12. Wheels — Chocked. Doesn't work on DCS.
- 13. Parking brake — Pull.
- 14. UHF FUNCTION selector — OFF.

- 15. OXYGEN switch — OFF.
- 16. EMERG generator switch — OFF. Open the cover first.



- 17. Standby attitude gyro — Cage. Doesn't work on the Sim.
- 18. Left throttle — OFF
- 19. Lights — OFF. Turn off all internal and external light switches.
- 21. CANOPY handle — OPEN (with LCTL+C)